


北京触点时代科技有限公司  
Onetouch China Technology Co., Ltd

SA0840W20-G3

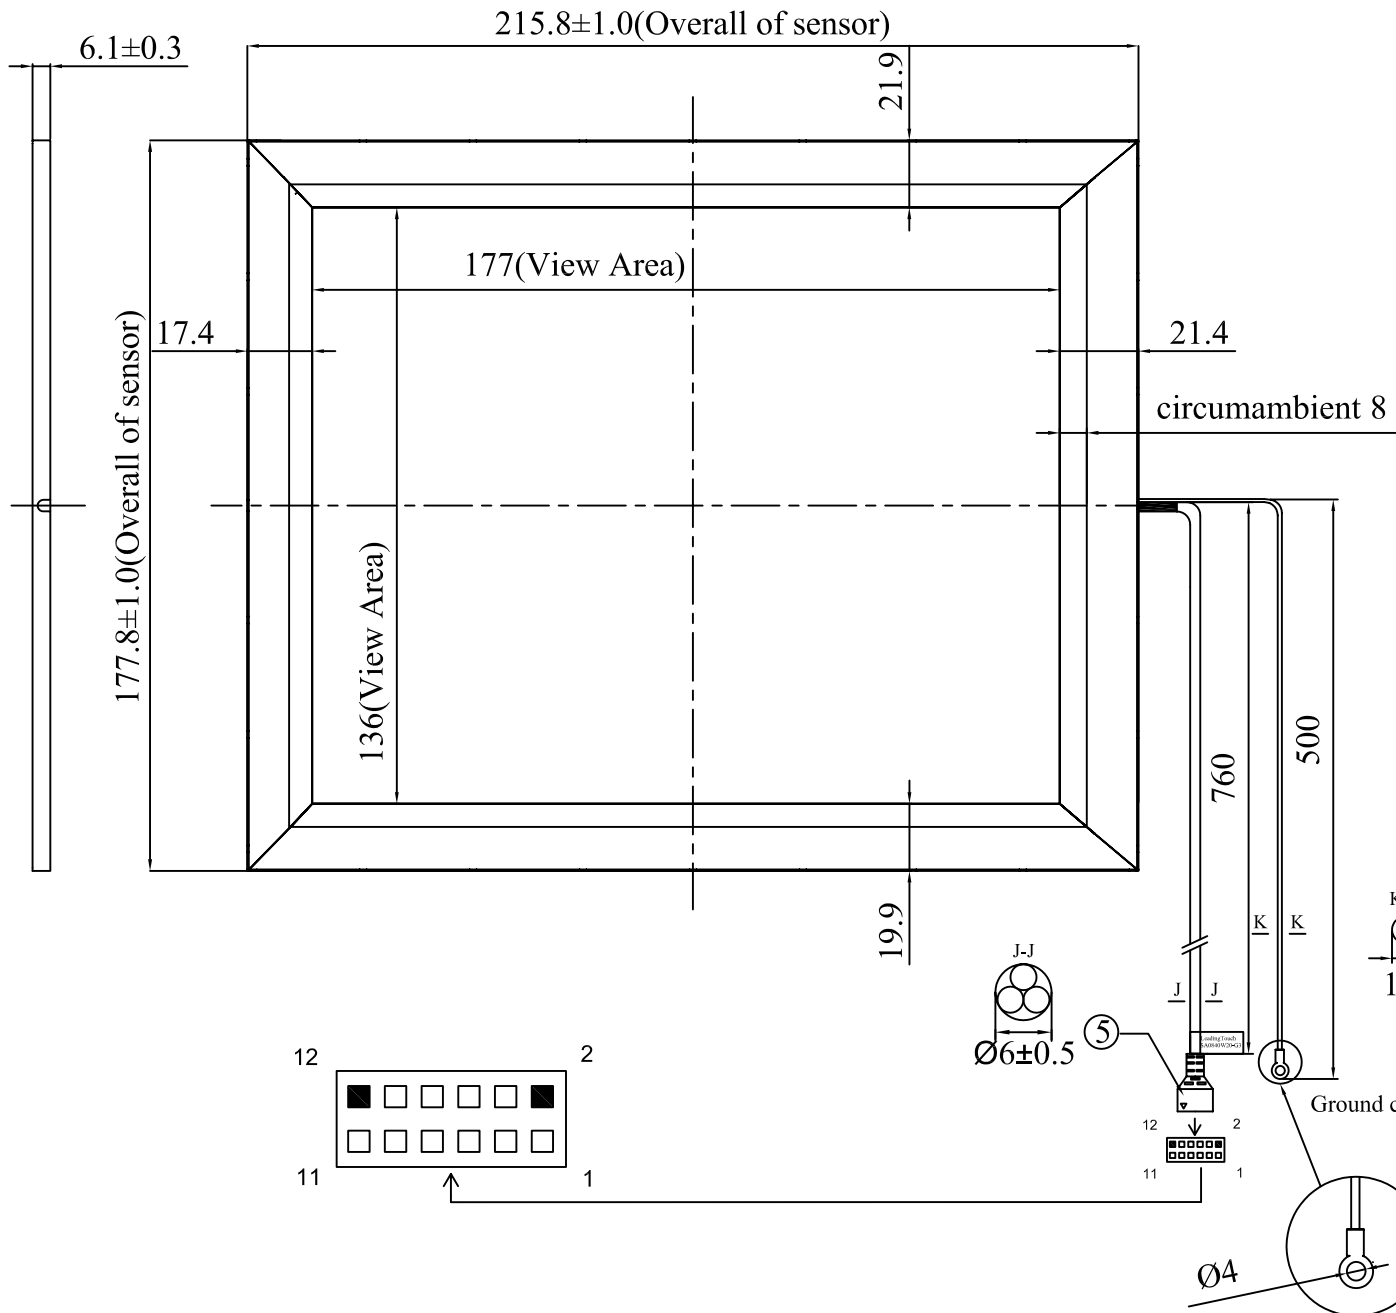

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
2. GLASS THICKNESS: 3mm NOMINAL.
3. WATERPROOF, DUSTPROOF, ANTIMAGNETIC AND ANTISTATIC PERFORMANCES.
4. THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF STAINLESS STEEL, AND THE COLOR IS BLACK.
5. LINE 14-6CX-XXX, WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
  - SAW SERIAL CONTROL BOARD SAW232(6000S)
  - SAW USB CONTROL BOARD SAWUSB (6000U)

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

**触点**  
**Onetouch**

SA0840W20-G3

DATE: 2007/3/1

REV. A0