


北京触点时代科技有限公司
Onetouch China Technology Co., Ltd

SA1710P20-G6

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
2. THE HEAT STRENGTHENED GLASS THICKNESS: 6mm NOMINAL.
3. WATERPROOF, DUSTPROOF, ANTIMAGNETIC, ANTISTATIC AND BREAK RESISTANT PERFORMANCES.
4. THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF STAINLESS STEEL, AND THE COLOR IS BLACK.
5. LINE 14-6CX-XXX, WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
 ----SAW SERIAL CONTROL BOARD SAW232(6000S)
 ----SAW USB CONTROL BOARD SAWUSB (6000U)

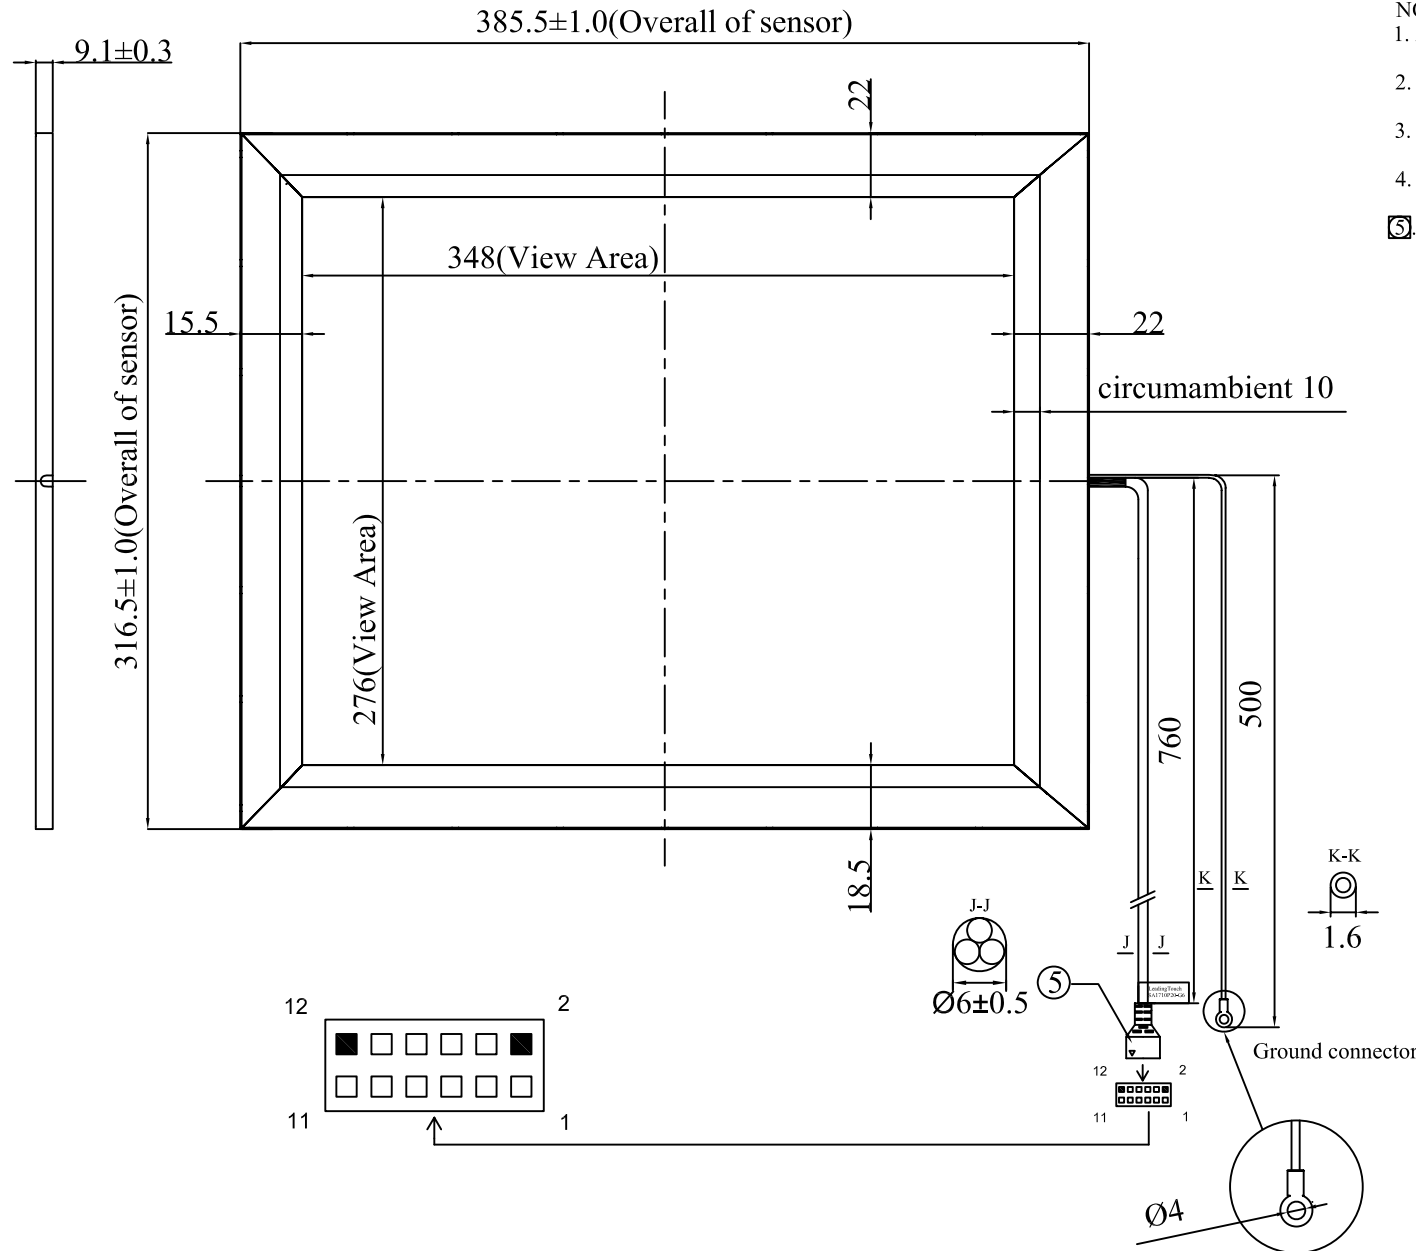

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

触点
Onetouch

SA1710P20-G6
DATE:2007/4/18
REV. A0