


北京触点时代科技有限公司
Onetouch China Technology Co., Ltd
SA1911W20-G3



- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS SHOWN ARE PROJECTED DISTANCES.
 2. GLASS THICKNESS: 3mm NOMINAL.
 3. WATERPROOF, DUSTPROOF, ANTIMAGNETIC AND ANTISTATIC PERFORMANCES.
 4. THE OUTER SHELL ADOPTS SPRAY-PLASTIC OF STAINLESS STEEL, AND THE COLOR IS BLACK.
 - ⑤ LINE 14-6CX-XXX, WITH 2x6 HOUSING RECEPTACLES, CONNECT TO
 - SAW SERIAL CONTROL BOARD SAW232(6000S)
 - SAW USB CONTROL BOARD SAWUSB (6000U)

CONNECTION CHART			
PIN	SIGNAL	INSULATION COLOR	JACKET COLOR
1	GROUND	OVERALL SHIELD	
2	KEY		
3	Y RECEIVE+	BLU	BLK
4	Y TRANSMIT+	BLU	GRY
5	Y RECEIVE-	BLK	BLK
6	Y TRANSMIT-	YEL	GRY
7	GROUND	INNER SHIELD	
8	X TRANSMIT-	RED	RED
9	X RECEIVE-	RED	BLK
10	X TRANSMIT+	GRN	RED
11	X RECEIVE+	WHT	BLK
12	KEY		

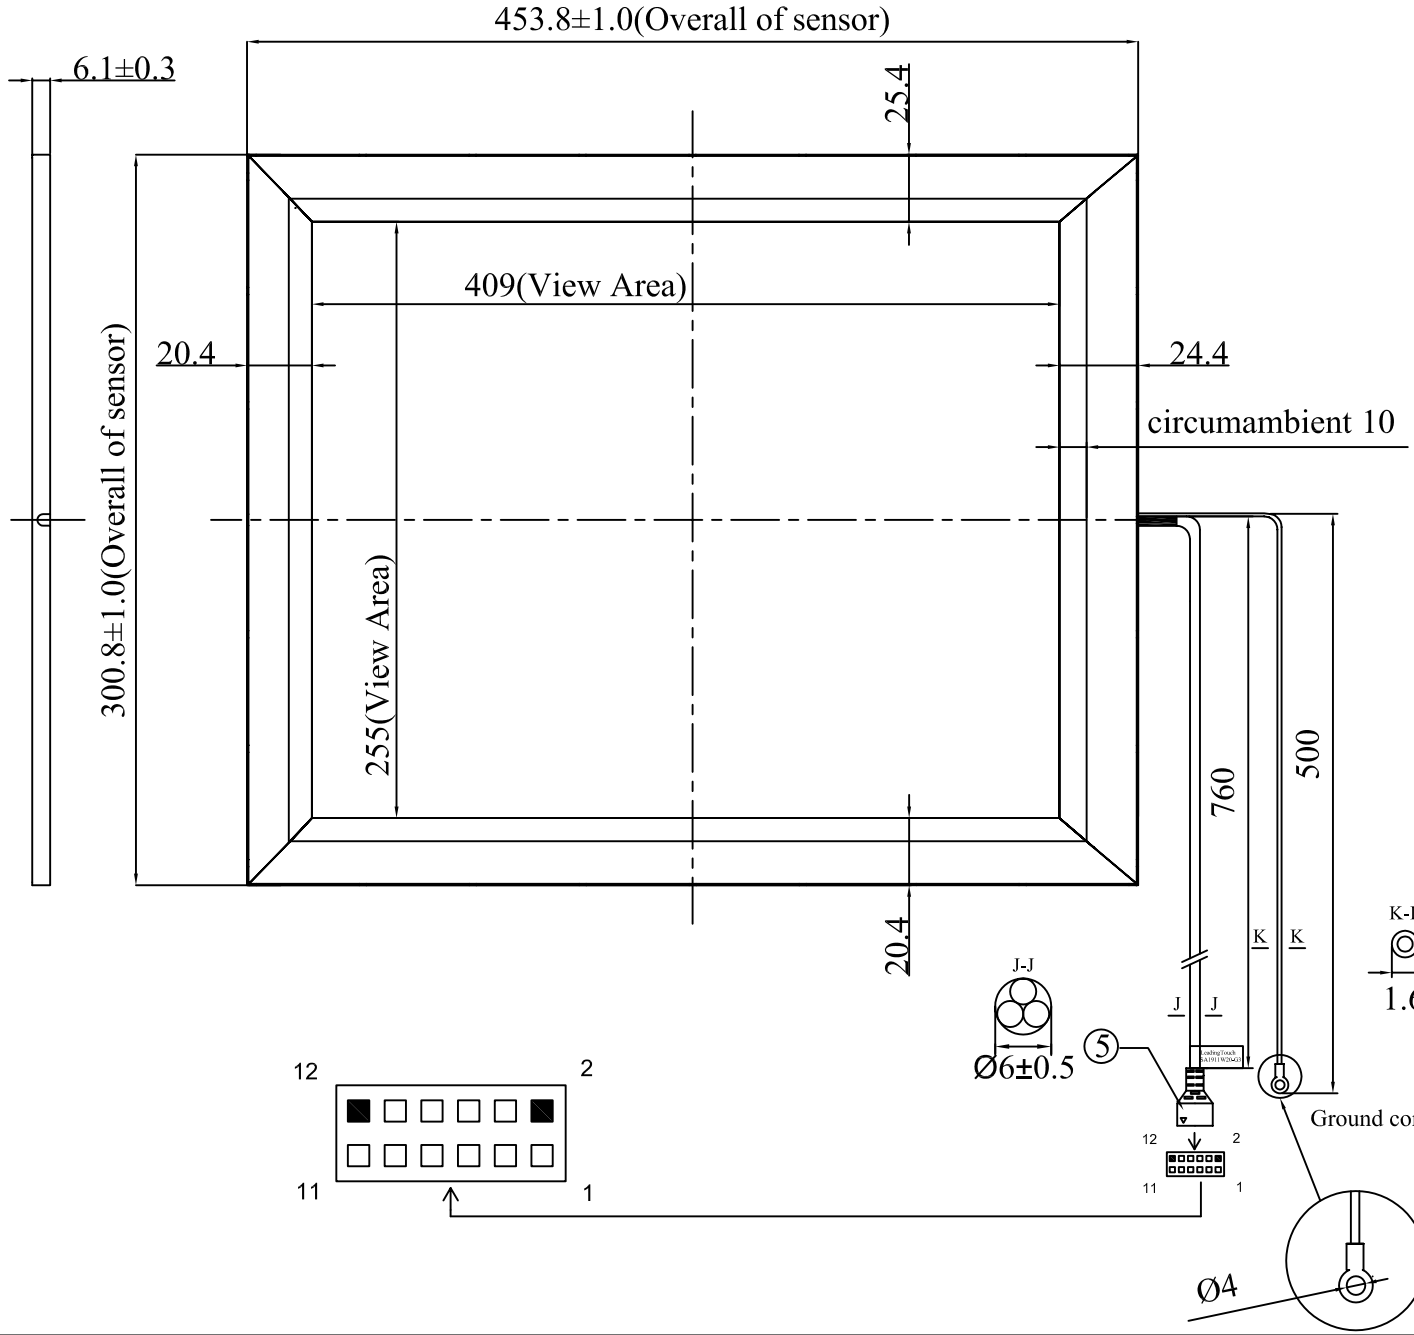

SA1911W20-G3
DATE: 2007/3/3
REV. A0